



SEMIFLOW® CO.65 Non-Contact Clamp-On Flow Sensors

SEMIFLOW clamp-on flow sensors are specifically designed for the semiconductor industry. The highly precise ultrasonic sensors measure directly through the rigid plastic tubing or pipe without any contact to the liquid, eliminating leakages and contaminations, thus increasing uptime and maximizing yield. Their compact housing with integrated electronics board is perfectly suited for a convenient system implementation.

Unique Product Benefits

- Maximum uptime
- Maximum yield
- Smallest footprint
- Highest accuracy

Semiconductor Applications

- Chemical supply / delivery systems
- Chemical mechanical polishing / planarization
- Single wafer cleaning
- Mask cleaning
- Slurry lines
- Wet etching



SEMIFLOW® Ex1 Set




The **SEMIFLOW Ex1 Set** enables non-contact liquid flow measurement on rigid plastic tubes and pipes in hazardous environments.

The set consists of the intrinsically safe flow sensor SEMIFLOW CO.66 PI Ex1 and the control gear Barrier Box ST Ex1.

- Protected against explosion hazard by gases, vapors and fogs according to gas group IIB
- Device protection level "Gb" for use in Zone 1 according to ATEX/IECEX



Intuitive and Easy to Handle



Technical Data

Measuring Method	Ultrasound transit-time technology	Accuracy	2%
Measuring Cycle	10 ms	Interfaces	0/4 ... 20 mA, 0 ... 20 kHz, PNP/NPN/Push-Pull, RS-485 Modbus, digital input
Material	PVC-C (housing) PA (connector)	Operating Voltage	12 ... 30VDC
Flow Range – Max.	0 ... 400,000 mL/min	Current Consumption	30 mA max.
Tubing – Outer Diameter	1/4" ... 50A	Media / Ambient Temperature	0 ... +90 °C at 0 ... +25 °C ambient 0 ... +60 °C at 0 ... +60 °C ambient
Tubing – Material	PFA, PTFE and other hard plastic tubes and pipes	Protection Class	IP65

Accessories

C³ Software



- Configure sensors
- Control sensor performance, set outputs/inputs
- Collect measurement and sensor data

Portable USB Data Converter



- Easy power supply of flow sensors
- Direct data transfer
- Sensor connection via PC and C³ Software

Remote Display




- Temporary/permanent flow monitoring
- Zero calibration and manual volume reset
- Visualization of parameters

Measurement Principle

SEMIFLOW flow sensors use the ultrasound transit-time technology to accurately determine flow rates. The sensors measure the time of flight of the ultrasonic wave with and against the flow direction of the liquid.

The time difference between both signals is a measure of the velocity of the streaming liquid. Measurements are taken in picoseconds and averaged to readings of 10 ms cycles. The flow volume is calculated from the fluid velocity and the cross-sectional area of the tubing.

- 1 Ultrasonic waves with and against flow direction

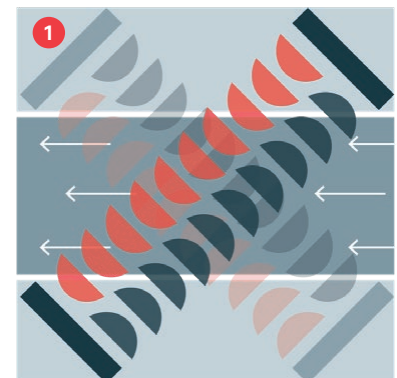

Sales & Support

SONOTEC US Inc.
190 Blydenburgh Rd
Suite 8, 2nd floor
Islandia, New York 11749, USA

☎ +1 631 415-4758
✉ sales@sonotecusa.com
🌐 www.sonotecusa.com

🛡 Certified according to
ISO 9001 and EN ISO 13485

SONOTEC® is a registered trademark
Rev. 3